

# Wash basin

EWG-1

**The single wash basin is a revelation in personal hygiene.**

**The wash basin is ergonomically designed, while the sensor operation allows you to lower the risk of infection.**

**The wash basin and tap are also manufactured entirely in stainless steel and the sensor-operated wash basin comes as standard with a legionella prevention system. To prevent unpleasant smells, an odour trap is installed in the drain.**

**This is supplied as standard.**

## Options and/or accessories

*The single wash basin is available with knee operation, stainless steel pedestal, soap dispenser, paper dispenser and paper basket.*

## Your benefits

- Automatic operation
- Enough space to wash both hands and fore arms
- Legionella prevention system (sensor-operated wash basins)
- Water does not stay in corners
- Full water jet through perlator
- Odour trap
- Knee operation does not need a power connection



*HACCP International certified products.*



*Our sensor-operated wash basins come with legionella prevention.*



*Wash basin EWG-1S*



*Wash basin EWG-1S-Deluxe*

## Versions:

- ▶ EWG-1S  
Sensor operated  
Legionella prevention  
Article number: 83207015
- ▶ EWG-1K  
Knee operated  
Article number: 83207115
- ▶ EWG-1S-Deluxe  
Sensor operated  
Legionella prevention  
Article number: 83207010
- ▶ EWG-1K-Deluxe  
Knee operated  
Article number: 83207110

# Case study

and technical information



*Wash basin EWG-1S, the tap is also made entirely from stainless steel.*

Type	EWG-1S	EWG-1K	EWG-1S-Deluxe	EWG-1K-Deluxe
Width / mm	503	503	430	430
Depth / mm	461	461	453	453
Height / mm	813	813	762	762
Safety	IP 65	-	IP 65	-
Electrical connection	230V / 50Hz	-	230V / 50Hz	-
Power / kW	0.1	-	0.1	-
Voltage	24V	-	24V	-
Water connection hot	1/2"	1/2"	1/2"	1/2"
Water connection cold	1/2"	1/2"	1/2"	1/2"
Water connection out	DN32	DN32	DN32	DN32

# Wash basins

EWG-2 to EWG-6

**Our wash basins EWG-2 to EWG-6 have been ergonomically designed. Sensor operation achieves a maximum level of hygiene. The wash basins and taps are made entirely from stainless steel. The sensor operated wash basins are fitted with a legionella prevention system as standard. To prevent unpleasant smells, an odour trap is installed in the drain. The wash basins are available with one basin (standard) or with separate basins (deluxe).**

## Options and/or accessories

*The wash basins can be optionally equipped with knee operation, stainless steel pedestal, soap dispensers, paper dispenser and paper basket.*

## Your benefits

- Automatic operation
- Enough space to wash both hands and fore arms
- Legionella prevention system (sensor-operated wash basins)
- Water does not stay in corners
- Full water jet through perlator
- Odour trap
- Knee operation does not need a power connection



*HACCP International certified products.*



*Our sensor-operated wash basins come with legionella prevention.*



*Wash basin EWG-3S, with optional soap dispensers.*

## Versions:

- ▶ EWG-2S to EWG-6S  
Standard version  
Sensor operated
- ▶ EWG-2K to EWG-6K  
Standard version  
Knee operated
- ▶ EWG-2S-Deluxe to EWG-6S-Deluxe  
Deluxe version  
Sensor operated
- ▶ EWG-2K-Deluxe to EWG-6K-Deluxe  
Deluxe version  
Knee operated

# Case study

## and technical information



Wash basin EWG-3S - standard version, with optional soap dispensers.

<b>Type (sensor operated)</b>	<b>EWG-2S</b>	<b>EWG-3S</b>	<b>EWG-4S</b>	<b>EWG-5S</b>	<b>EWG-6S</b>
Article number	83207020	83207030	83207040	83207050	83207060
Width / mm	975	1475	1975	2475	2975
Depth / mm	546	546	546	546	546
Height / mm	760	760	760	760	760
Safety	IP 65	IP 65	IP 65	IP 65	IP 65
Number of places	2	3	4	5	6
Electrical connection	230V / 50Hz	230V / 50Hz	230V / 50Hz	230V / 50Hz	230V / 50Hz
Voltage	24V	24V	24V	24V	24V
Water connection hot / cold	1/2"	1/2"	1/2"	1/2"	1/2"
Water connection out	DN32	DN32	DN32	DN32	DN32
<b>Type (knee operated)</b>	<b>EWG-2K</b>	<b>EWG-3K</b>	<b>EWG-4K</b>	<b>EWG-5K</b>	<b>EWG-6K</b>
Article number	83207120	83207130	83207140	83207150	83207160
Width / mm	975	1475	1975	2475	2975
Depth / mm	546	546	546	546	546
Height / mm	760	760	760	760	760
Number of places	2	3	4	5	6
Water connection hot / cold	1/2"	1/2"	1/2"	1/2"	1/2"
Water connection out	DN32	DN32	DN32	DN32	DN32

# Double wash basins

EWG-2-D to EWG-6-D

**Double wash basins are suitable for processing large numbers of people, saving you unnecessary waiting times. The double wash basins are made entirely from stainless steel. The sensor operated versions are fitted with a legionella prevention system as standard. To prevent unpleasant smells, an odour trap is installed in the drain. This is supplied as standard.**

## Options and/or accessories

*The double wash basins are optionally available with knee operation, soap dispensers, paper dispenser and paper basket.*



*Wash basin EWG-3S-D*

## Your benefits

- Automatic operation
- Enough space to wash both hands and fore arms
- Legionella prevention system (sensor-operated wash basins)
- Water does not stay in corners
- Full water jet through perlator
- Odour trap
- Knee operation does not need a power connection



*HACCP International certified products.*



*Our sensor-operated wash basins come with legionella prevention.*

## Versions:

- ▶ EWG-2S-D to EWG-6S-D  
Sensor operated
- ▶ EWG-2K-D to EWG-6K-D  
Knee operated

# Case study

## and technical information



*Wash basin EWG-4S-D, with optional soap dispenser.*

<b>Type (sensor operated)</b>	<b>EWG-2S-D</b>	<b>EWG-3S-D</b>	<b>EWG-4S-D</b>	<b>EWG-5S-D</b>	<b>EWG-6S-D</b>
Article number	83207220	83207230	83207240	83207250	83207260
Width / mm	975	1475	1975	2475	2975
Depth / mm	1179	1179	1179	1179	1179
Height / mm	1342	1342	1342	1342	1342
Safety	IP 65	IP 65	IP 65	IP 65	IP 65
Number of places	2 x 2	2 x 3	2 x 4	2 x 5	2 x 6
Electrical connection	230V / 50Hz	230V / 50Hz	230V / 50Hz	230V / 50Hz	230V / 50Hz
Voltage	24V	24V	24V	24V	24V
Water connection hot / cold	1/2"	1/2"	1/2"	1/2"	1/2"
Water connection out	DN32	DN32	DN32	DN32	DN32
<b>Type (knee operated)</b>	<b>EWG-2K-D</b>	<b>EWG-3K-D</b>	<b>EWG-4K-D</b>	<b>EWG-5K-D</b>	<b>EWG-6K-D</b>
Article number	83207120	83207130	83207140	83207150	83207160
Width / mm	975	1475	1975	2475	2975
Depth / mm	1179	1179	1179	1179	1179
Height / mm	1342	1342	1342	1342	1342
Number of places	2 x 2	2 x 3	2 x 4	2 x 5	2 x 6
Water connection hot / cold	1/2"	1/2"	1/2"	1/2"	1/2"
Water connection out	DN32	DN32	DN32	DN32	DN32



# Wash basins with hand dryer

EWG-2S-TAP to EWG-6S-TAP

**The EWG-TAP has been ergonomically designed. Touch free operation ensures a maximum level of hygiene. After washing your hands, the integrated Dyson Airblade Tap hand dryer produces a powerful air flow for drying. A mixing valve enables you to configure the desired water temperature. The entire installation is made from hygienically finished stainless steel. Standard delivery includes the pedestal with inspection shutter.**

## Your benefits

- Saves water due to sensor operation
- Integrated dryer saves space
- Both hand washing and drying with touch-free operation
- No water on the floors
- Including siphon
- 12 second dry time




*HACCP International certified products.*

dyson airblade tap



## Versions:

- ▶ EWG-2S-TAP to EWG-6S-TAP

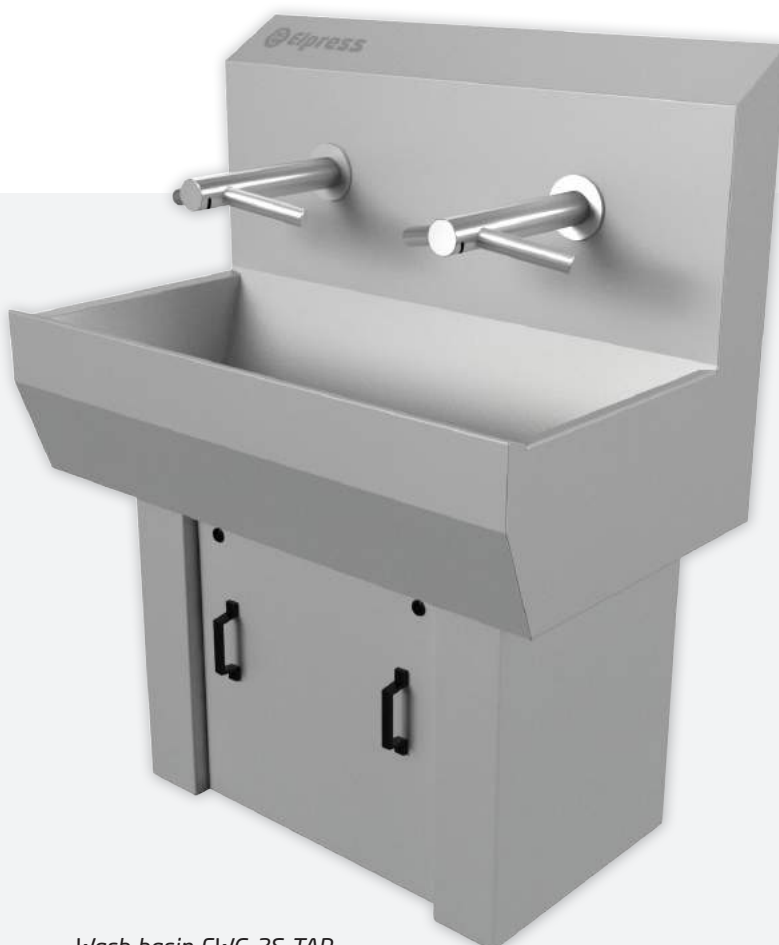

*Wash basin EWG-2S-TAP*

# Case study

and technical information



*Wash basin EWG-2S-TAP, wash and dry your hands with the integrated Dyson Airblade Tap hand dryer.*

Type (sensor operated)	<b>EWG-1S-TAP</b>	<b>EWG-2S-TAP</b>	<b>EWG-3S-TAP</b>	<b>EWG-4S-TAP</b>	<b>EWG-5S-TAP</b>	<b>EWG-6S-TAP</b>
Article number	83207410	83207420	83207430	83207440	83207450	83207460
Width / mm	503	1003	1503	2003	2503	3003
Depth / mm	615	615	615	615	615	615
Height / mm	1290	1290	1290	1290	1290	1290
Safety	IP 35	IP 35	IP 35	IP 35	IP 35	IP 35
Number of places	1	2	3	4	5	6
Electrical connection	230V / 50Hz	230V / 50Hz	230V / 50Hz	230V / 50Hz	230V / 50Hz	230V / 50Hz
Power / kW	1.6	3.2	4.8	6.4	8	9.6
Water connection hot / cold	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Water connection out	DN32	DN32	DN32	DN32	DN32	DN32